

# Ifö Urinal Sensor



Ifö urinal Sensor, connection from the rear  
Ifö urinal Sensor, connection from the top

Ifö no.

41300  
41310

Available in white only. All dimensions in mm.

The delivery includes:

Wall hooks, Ifö no. 98204


4 pcs AA batteries (6v)

Installation instructions, Ifö no. 91476

Options:

Protection cover in stainless steel, for mounting underneath the urinal, Ifö no. 91743

## Urinal 4130 och 4131

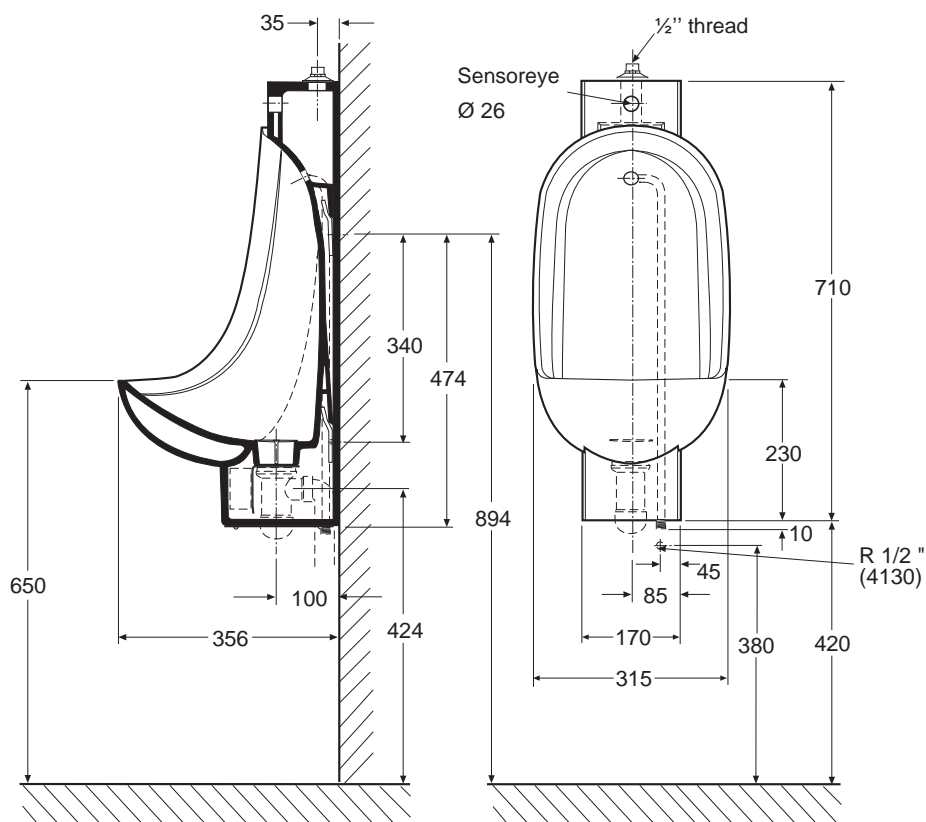

The sensor sensitivity distance is 0-50 cm. The pre-flush time is 2 seconds, with a 2-second delay. When leaving the urinal, it after-flushes for 6 seconds, with a 2-second delay. The timing and the sensitivity are not adjustable. The electronic is powered by 4 AA (6v) alkaline batteries. For more information, see the installation instruction or Ifö Sensor 100 and 150, page 6:6.